



PRODUCT

PRECISION HD RIFLESCOPE

PRECISION HD RIFLESCOPE

MODEL

HD 6-24x50FFPIR

HD 6-24x50FFP

HD 6-24x50SFPIR

HD 6-24x50SFP

RETICLE

FFP MIL

SFP MIL

SKU#

HD30624

HD30625

HD30624S

HD30625S

IDEAL APPLICATION




HUNTING

ALTERNATIVE APPLICATION



LONG RANGE

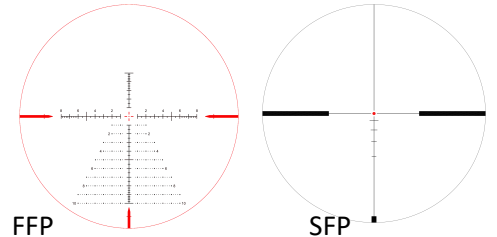

FEATURES

Aerospace-grade T7075 aluminum tube
Etched illuminated glass reticle
IPX7 waterproof rating-One piece tube design-Nitrogen-filled for fog resistance
5 year warranty

PRECISION ZERO STOP

Advanced adjustment function is used to help the shooter quickly and accurately return to the initial zero position. The core function of this system is to easily return the adjustment knob to the original zero position after the shooter makes an elevation adjustment.

KEY FEATURES OF KECK GLASS RETICLE

Clear Vision: High-quality glass and coating technology ensure clear markings in all lighting conditions.Precise Scale: Laser-engraved for accuracy, allowing quick target adjustments.Durable: Impact-resistant and heat-resistant, suitable for harsh environments.Wide Application: Suitable for tactical shooting, sniper operations, long-range hunting, and competitive shooting, meeting the diverse needs of both military and civilian shooters.

ALL FEATURES



At 100 yards, after 2500 rounds of 7.62x51mm live fire, the deviation was less than 1.5 MOA with no noticeable shift in the aiming point. Despite the strong recoil, the lenses and internal optical components remained intact, with no damage or displacement, and the optical clarity and brightness were unaffected. The external protection and internal mounting systems showed no loosening or damage, ensuring long-term aiming stability.

Conclusion: The 7.62x51mm test confirms the excellent shock resistance of KECK scopes. Whether facing strong recoil or prolonged use, they consistently maintain precise aiming and superior optical performance, providing reliable tactical support

SPECS

Magnification:	6-24x50
Scope Tube Diameter:	30mm
Lens Coating:	fully green multi coated
Reticle Type (Etched / Wire):	reticle
Ocular Lens Diameter:	35mm
Objective Lens Diameter:	50mm
Exterior Finish:	Matte Black
Mounting Length:	155mm
Objective/Field of View/ (100yds) :	18.9-4.7 feet (3.6°-0.9°)
Exit Pupil:	10mm - 2mm
Eye Relief:	3.78"- 3.74",(96mm-95mm)
Diopter Adjustment:	±2.0
Adjustment Click Value:	1/10 MIL
Max. elevation adjustment range (MOA):	90MOA
Max. windage adjustment range (MOA):	70MOA
Parallax correction(yds):	10yds-∞
Length:	13.9", (352.0mm)